

# LIGHTWEIGHT BUILDING MEDIUM SPORTS STRUCTURE

## Specifications

Eave height: 3.00m to 4.00m

Span width: 18.00m to 20.00m

Ridge height: 8.12m

Bay distance: 5.00m

Roof pitch: 45° / 15°

Number of gable uprights: 3 Gable upright

(per end)

Longest component: 7.72m

Minimum length: 15.00m

Maximum length: Unlimited in 5.00m

increments

Max allowed wind speed: 102 km/h

 $(0.50kN/m^2)$ 

Main profile size: 252/122/4mm

Eave connection type: Galvanised steel

insert

Aluminium type: European - Hard Pressed

Extruded Structural Aluminium

Connecting components: European - hot


dipped, structural grade corrosive resistant


galvanised steel

Roof covering type: Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA

NFPA701.



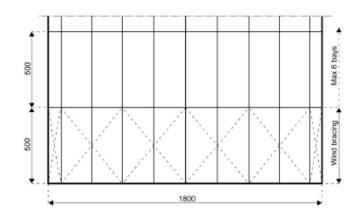

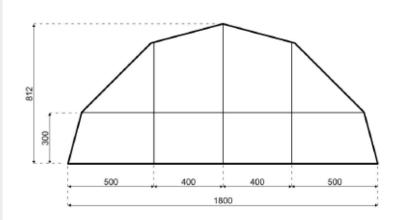



## LIGHTWEIGHT BUILDING

### MEDIUM SPORTS STRUCTURE

#### ACCESSORIES

